


MESERA CRANES

Mesera cranes are easily adaptable to your needs. On most models there is a slope base that improves the usability of the combination on uneven terrain. Constant-pressure hydraulics and efficient boom geometry ensure fast and accurate loading.

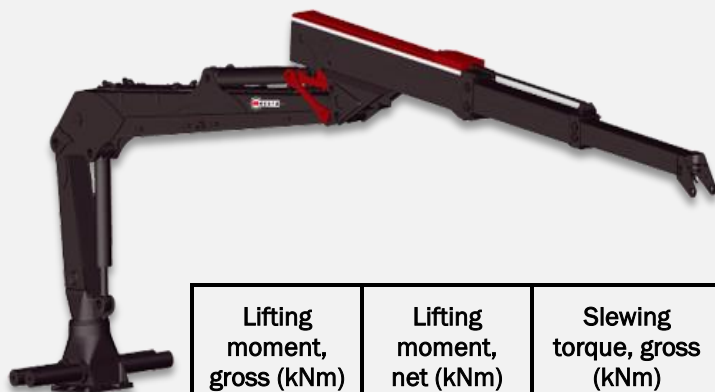

	Lifting moment, gross (kNm)	Lifting moment, net (kNm)	Slewing torque, gross (kNm)	Slewing angle (°)	Weight without oil and equipments (kg)	Maximum outreach (m)	Maximum load (kg)
M 51 F 65	64	49	15.9	380	855	6.5	730
M 51 FT 87	64	43	15.9	380	1.015	8.6	480
M 51 FT 96	64	41	15.9	380	1.025	9.5	400
F 59 F 72	78	56	21.9	380	1.110	7	810
F 59 FT 85	78	51	21.9	380	1.215	8.4	590
F 59 FT 100	78	47	21.9	380	1.330	10	410
F 59 FT 100i	78	47	21.9	380	1.350	10	410
71 FT 79i	99	70	24.4	380	1.360	7.7	900
71 FT 79	99	70	24.4	380	1.350	7.9	840
71 FT 83i	99	68	24.4	380	1.390	8	830
71 FT 85	99	70	24.4	380	1.355	8.4	800
71 FT 100	99	70	24.4	380	1.460	10	580
71 FT 100i	99	70	24.4	380	1.460	10	580
F 83 F 72	106	82	26.1	380	1.240	7	1.190
83 FT 79i	106	76	26.1	380	1.380	7.7	980
83 FT 83i	106	74	26.1	380	1.410	8	920
F 83 FT 85	106	76	26.1	380	1.370	8.4	910
F 83 FT 91	106	72	26.1	380	1.450	9.1	810
F 83 FT 100 i	106	73	26.1	380	1.480	10	640
92 F 80i	130	96	39	360	1.690	7.9	1.160
92 FT 86i	130	87	39	360	1.800	8.5	1.000
92 FT 100i	130	84	39	360	1.890	10	780
F 111 F 72	151	111	41	380	1.900	7	1.610
F 111 F 78	151	107	41	380	1.960	7.8	1.340
F 111 FT 85	151	100	41	380	2.140	8.5	1.110
F 111 FT 91	151	98	41	380	2.200	9	1.030
F 111 FT 100	151	101	41	380	2.090	10	940
M 122 F 81i	155	113	44	380	1.990	8.1	1.380
M 122 F 85i	155	110	44	380	2.030	8.5	1.270
M 122 FT 96i	155	103	44	380	2.130	9.5	1.040
M 122 FT 100i	155	99	44	380	2.150	9.9	960
M 122 FT 104i	155	99	44	380	2.090	10	950
M 142 F 81i	178	135	48	380	2.010	8.1	1.650
M 142 F 85i	178	132	48	380	2.070	8.5	1.500
M 142 FT 96i	178	124	48	380	2.100	9.5	1.270
M 142 FT 100i	178	120	48	380	2.170	9.9	1.150
M 142 FT 104i	178	115	48	380	2.130	10	1.120
M202 FT 96i	266	177	68	202	3.800	9.6	1.835