
Forestcorte Máquinas

WOODCRACKER C

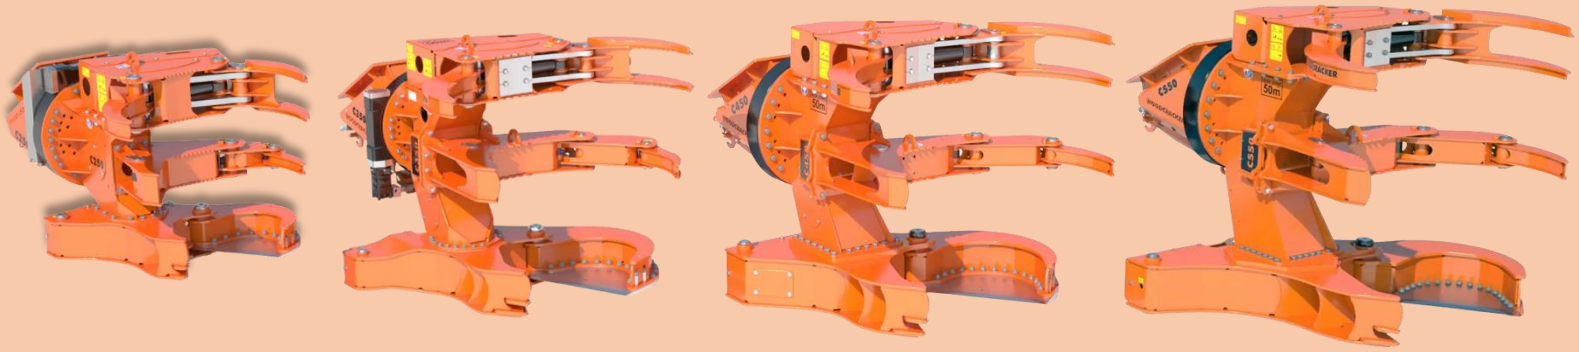

Woodcracker C cutterheads make it easy to safely harvest trees and shrubs. Suitable for crop harvesting, rough terrain, mountainous areas, logging, problematic or dangerous slopes and humid environments.

	C250	C350	C450	C550
Cutting diameter (soft wood) – mm	330	400	500	600
Cutting diameter (hard wood) – mm	280	350	450	550
Gripper opening - mm	930	1.430	1.600	1.600
Shear opening – mm	450	700	800	900
Deadweight (Base – Full equipment) – kg	580 – 970	1.150 – 1.620	1.760 – 2.350	2.000 – 2.620
Recommended pump flow capacity main circuit – L/min.	50-100	70-150	80-160	100-190
Recommended operating pressure – bar	280	280	280	280

KEY FACTS

- Suitable for every standard excavator, only 4 hydraulic connections needed (including all options).
- Proper and simple connection.
- Replaceable, high-strength blade, easy to sharpen, patented.
- Additional workload of the carrier vehicle due to the treeshear Woodcracker ® C.
- Automatic lubrication system for Tiltator
- Supporting foot for safe storage and transport.
- Robust and proven technology – Low-wear and low-service.
- KTL-primed (cathodic dip-coating) and powder coating. Made of high-strength Hardox ® steel.

OPTIONS

- Autospeed: allows faster closing of the cutting mechanism in weak wood.
- Acumulador (C300 - C550 as quick coupler QC): Used to work fast in weak wood and to bunch material. Accumulator can be removed easily to reduce the machine's weight.
- 4 different mounting options:
  - Rigid mounting: using slewing drive of excavator
  - Cylinder swivel unit: 2 x 48° swivelling, low-maintenance
  - Tiltator: continously rotating (360°)
  - Power-Tiltator: during tree removal, the Power Tiltator provides more strength by the means of double torque at the same speed.

FORESTCORTE MÁQUINAS, S.A.
Telef. (+351) 256 920 010 E-mail: geral@forestcortemaquinas.pt Site www.maquinasflorestais.com
Rua dos Pousadinhos nº297, Zona industrial das Lameiradas, 4540-423 Mansores, Arouca – PORTUGAL